

WITNESS MONUMENT TIES

ID	BEARING	DISTANCE	DESCRIPTION
Witness A	N 18d E	32.2'	Mag nail found 0.75' above grade on the west side of 10" PSI utility pole #150-174
Witness B	S 2d W	26.5'	Monroe County "PROTECT NEARBY SURVEY MARKER" sign found 2.1' above grade on the north side of 11" utility pole #297-582
Witness C	S 11d W	44.8'	Cut + found on the north flange bolt of fire hydrant

MONUMENT ACCESSORIES

Other survey grade monuments that were located in the vicinity and their relation to the monument.
Geodetic coordinates in this table are provided in the format Easting, Northing.

(#10327)	N 17d52'43" W	31.14'	3120744.22, 1429505.90 Cut + in the east back of curb inlet
(#10330)	N 62d14'45" W	68.55'	3120693.12, 1429508.19 Cut + in the north back of curb inlet
(#10332)	N 51d33'57" E	63.12'	3120803.23, 1429515.50 Cut + in the southeast corner of concrete pad for bus stop shelter
(#10336)	S 43d1'15" W	61.69'	3120711.69, 1429431.16 Cut + in the southwest back of curb inlet
(#10339)	S 37d34'25" E	28.58'	3120771.21, 1429453.61 Cut + in the northeast end of curb

NOTES:

- Field work was performed on September 25 and October 11, 2018.
- Monroe County Surveyor's Field Book 52, page 48.
- Project Name: INDOT Network 2018, Field work by: RSO, Drawn by: RSO, Reviewed by: RSO, TER & SRB.
- The basis of bearings is Grid North NAD83(2011), Indiana West Zone, Epoch 2010.0000, Geoid Model G2012BU7, Datum NAD83_NO_TRANS, US Survey Feet, derived from GPS observations utilizing the Indiana Real-Time Network (INCORS). Distances obtained with GPS have not been adjusted to ground. Coordinate data was collected with a Javad Triumph LS Network Rover.
- Vicinity sketch was compiled per 2017 aerial photography.
- This monument was witnessed by the Monroe County Surveyor, Kevin Enright, on June 9, 1998 and accepted by the Surveyor Review Board on July 30, 1998. We collected coordinates on the known monument in preparation for an upcoming INDOT resurfacing project in the area. Historic research has not yet been performed to prove the validity of this monument.

▲ **Monument Description:** Railroad spike found 0.45' below grade

State Plane Grid Coordinates: Point No.:10181 Northing: 1429476.27', Easting: 3120753.78'

SHEET
1
OF
2


MONUMENT RECORD
CORNER ID:
Blm_S23

Center 1/4 Corner
Section 35- T09N-R01W
Bloomington Township
Monroe County, Indiana



OFFICE OF THE MONROE COUNTY SURVEYOR
Trohn Enright-Randolph Monroe County Surveyor
Rachel Savich Oser Professional Surveyor
119 West 7th Street, Bloomington, IN 47404 (812) 349-2570

Photos were taken on 10/11/2018 with an iPhone 6s

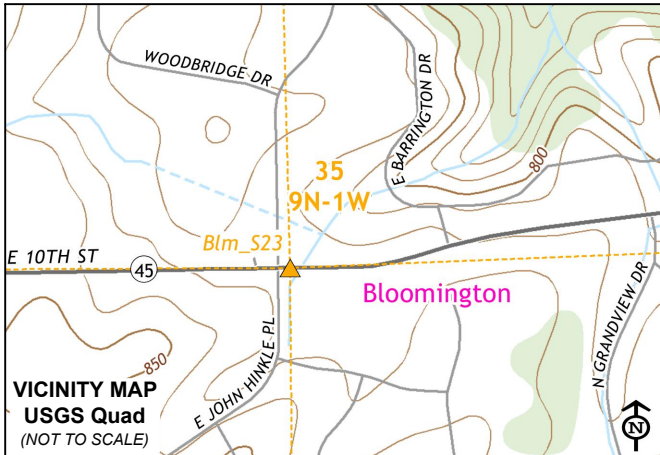

Trohn Enright-Randolph
Trohn Enright-Randolph
Monroe County Surveyor



Accepted by the Monroe
County Surveyor Review Board
on 12/06/2018



Rachel Oser
Rachel Savich Oser, State of Indiana
Professional Surveyor No. 21100022

SHEET
2
OF
2

MONUMENT RECORD
CORNER ID:
Blm_S23

Center 1/4 Corner
Section 35- T09N-R01W
Bloomington Township
Monroe County, Indiana



OFFICE OF THE MONROE COUNTY SURVEYOR
Trohn Enright-Randolph *Monroe County Surveyor*
Rachel Savich Oser *Professional Surveyor*
119 West 7th Street, Bloomington, IN 47404 (812) 349-2570

MONUMENT RECORD
State of Indiana - County of Monroe

Section: 35


Township: 9 North

Range: 1 West

Corner ID: Blm S-23

Monument Description & Remarks: Found Railroad Spike, painted orange, 4" under road surface at center of section. Stamped "+" in top of RR spike and painted white 4' x 4' cross on road.

References on file in the County Surveyor's Office: Smith-Quillman survey recorded in Book 3, Page 474, in the Recorder's Office.

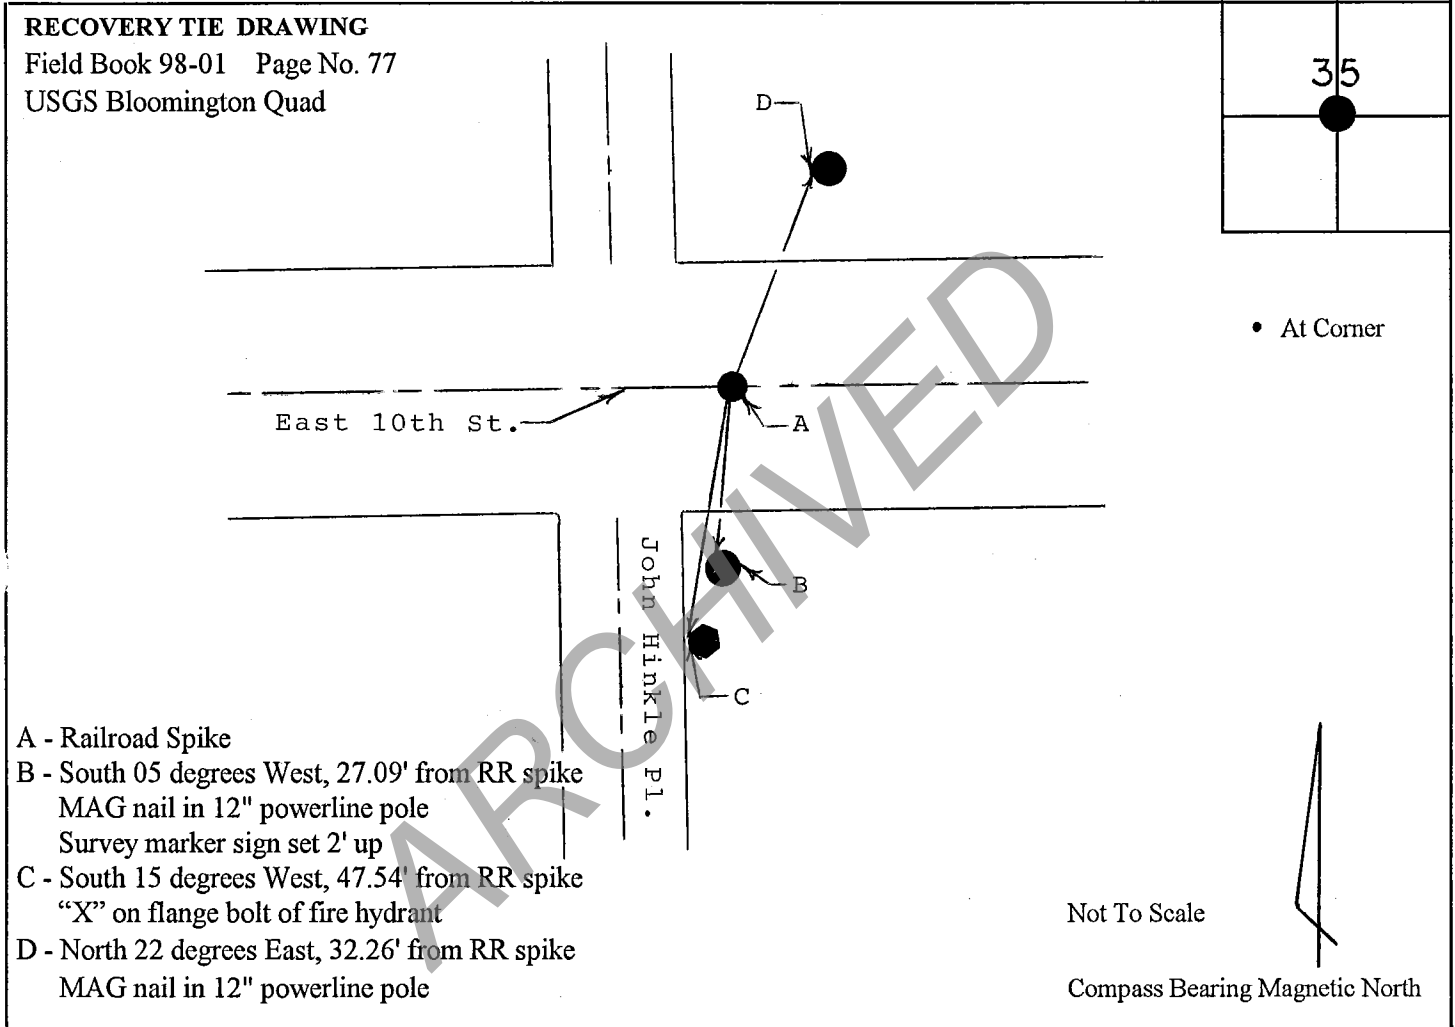

I, Kevin P. Enright, Monroe County Surveyor, hereby certify that this document was prepared under my direction in accordance with the provisions of Section 36-12-11 of the Indiana Code; and the above data is given under my hand and seal this 9th day of June, 1998.

Kevin P. Enright
Administered by: Surveyor Review Board

